

Since 1978, G&H Manufacturing has engineered exceptional products for the waste and recycling industry. We manufacture the #1 most requested hoist in the industry.

Innovative designs are combined with cutting edge technology and genuine craftsmanship, exceeding all industry standards and providing unsurpassed quality and assurance.

Side Rollers incorporate Aluminum Bronze Bushings secured with bolts and collars



Standard, Heavy-duty, one piece Rear Roller or Quick-Change Rear Roller available

Interchangeable Fenders, Cylinders, and Sheaves

Heavy-duty steel Rear Hinge with 32" pin surface

Rear ICC Bumper automatically raises, as the hoist is raised

Enclosed Sealed Beam Lights mounted in rubber


Available Options

Dead Lift
LED Lights
Wetline Kit
Back up Alarm
Extendable Tail
Automatic Tarper
Window Protector
Tool Box 24", 36", 48"
Fire Extinguisher Rack
Quick Change Rear Roller
Steel or Aluminum Fenders
Ball Valve on Hydraulic Oil Tank
Air Controls (Dual Lever or Joystick)
Inside/Outside Rails with or without Rollers

Standard Features

Hoist up Alarm
Mid-Turn Signals
Ratchet Tie Downs
Poly Fenders - Interchangeable
Side Mount Hydraulic Oil Tank
Three Spool Valve Controls
32" Steel Rear Hinge

Safety Prop
Grease Fittings on all Wear Points
In-tank Microglass Hydraulic Filter
ISO 18/15/13 Oil Cleanliness Standard
Air Shift P.T.O. with Direct Mount Pump
Inside Cable and Outside Valve Control
Hoist set up to add Third Axle with Single Tire

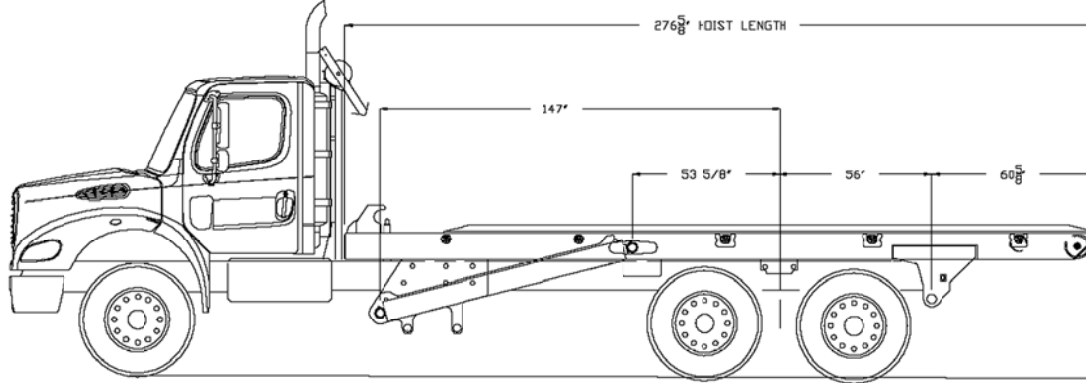

1500 Roll Off Hoist Specifications

Model GH 1500 - 60,000 lb. Capacity (22 ft. box)	
Cylinders	Interchangeable lift and reeving cylinders 6 in. bore X 79 in. stroke single stage
Fenders	Poly replaceable and interchangeable
Air Shift PTO	With direct mounted pump
Hydraulic Tank	50 gallon capacity, side mounted steel
Frame	10 in. X 4 in. X 1/2 in rectangular tubing
Lights	Enclosed sealed beam lights mounted in rubber
Controls	Cable inside and outside of cab
Outside Rollers	4 in. O.D. X 3 3/4 in. long with Aluminum Bronze Bushings
Sheaves	10 in. Diameter with Aluminum Bronze Bushings for longer life
Rear Hinge	Heavy-Duty Steel with 32 in. pin surface
Grease Fittings	At all wear points
Lift Capacity	50,000 to 60,000 lb.
Dump Angle	Approximately 50 degrees
Operating Pressure	1900 PSI
Pump	66 GPM at 1500 RPM
Valve	Multiple Stack - 4 Way Sections
Filter	100 GPM in-tank return line
Cycle Times	34 Seconds
Rear Hold Down	Ratchet Tie Downs
Wear Strips	1/2 in. X 3 in. bar

Model GH 1560 - 60,000 lb. Capacity (22 ft. box)	
The following specifications are the ONLY differences between the 1500 and 1560 Roll Off Hoists	
Cylinders	Interchangeable lift and reeving cylinders 7 in. bore X 79 in. stroke single stage
Cycle Times	39 Seconds

