



Since 1978, G&H Manufacturing has engineered exceptional products for the waste and recycling industry. We manufacture the #1 most requested hoist in the industry.

Innovative designs are combined with cutting edge technology and genuine craftsmanship, exceeding all industry standards and providing unsurpassed quality and assurance.

Optional Retaining Walls prevent containers from sliding

Standard Smooth Floor or Tread Plate Floor options



Optional Sliding Rail for Ratchet Tie Downs; used to accommodate different sized boxes

Optional Stake Pockets

Spring Loaded Drop Leg (not shown) allows you to hook and unhook the 8500 quickly and easily


By combining the 8500 Container Carrier Trailer with an 8000 Container Carrier, you can significantly reduce the number of trips necessary to finish a route. Also, the 8000 can be used to unhook the 8500, reducing loading time.

### Available Options

- Retaining Rail
- Stake Pockets
- Tread Plate Floor
- Smooth Steel Floor
- Goose Neck on Trailer
- Sliding Rail for Ratchet Tie Downs
- Air Brakes (with ABS single or tandem axle trailer)
- Electric Brakes (with ABS single or tandem axle trailer)

### Standard Features

- Drop Leg
- Ratchet Tie Downs
- 20,000 lb Suspension
- Two Axles (10,000 lbs. per Axle)
- Sealed Beam Lights mounted in rubber and enclosed in a steel light box

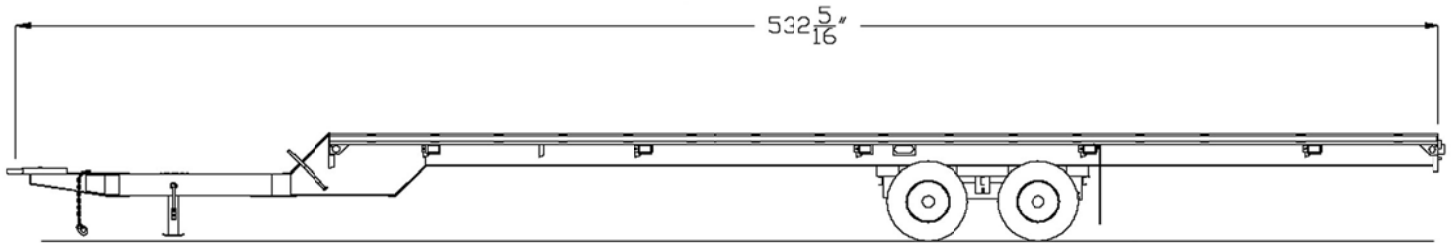

## 8500 Container Trailer Specifications

	<b>Model 8530</b>	<b>Model 8540</b>	<b>Model 8550</b>
<b>Capacity</b>	20,000 lbs.	20,000 lbs.	20,000 lbs.
<b>Number of Bays</b>	3	4	5
<b>Length A</b>	352 in. (29 ft. 4 in.)	438 in. (36 ft. 6 in.)	524 in. (43 ft. 8 in.)
<b>Height B</b>	35 in.	35 in.	37 in.
<b>Empty Weight</b>	3,400 lb.	3,600 lb.	3,800 lb.
<b>Main Frame Member</b>	10 in. Wide Flange	10 in. Wide Flange	12 in. Wide Flange
<b>Drop Leg</b>	Manual Spring Loaded		
<b>Axles</b>	Two with a 10,000 lb. Capacity Each		
<b>Suspension</b>	20,000 lb. Capacity, Tandem, 10 Leaf Slipper Spring		
<b>Tongue</b>	8 in. X 3 in. Rectangular Tubing		
<b>Ratchet Tie Downs</b>	3 in. Ratchet Tie Down with 3 in. X 30 ft. Nylon Strap per Bay		
<b>Lights</b>	Sealed Beam Lights are mounted in rubber and enclosed in a Steel Light Box (Meets DOT Requirements)		
<b>Mud Flaps</b>	Rubber		
<b>Hitch</b>	22,000 lb. Capacity Draw Bar		
<b>Brake Options</b>	Electric or Air		
<b>Outer Frames</b>	4 in. Channel		
<b>Optional Solid Deck</b>	Smooth Steel or Tread Plate		

